


SRXXX-P

10W~200W

PRODUCT SPECIFICATION

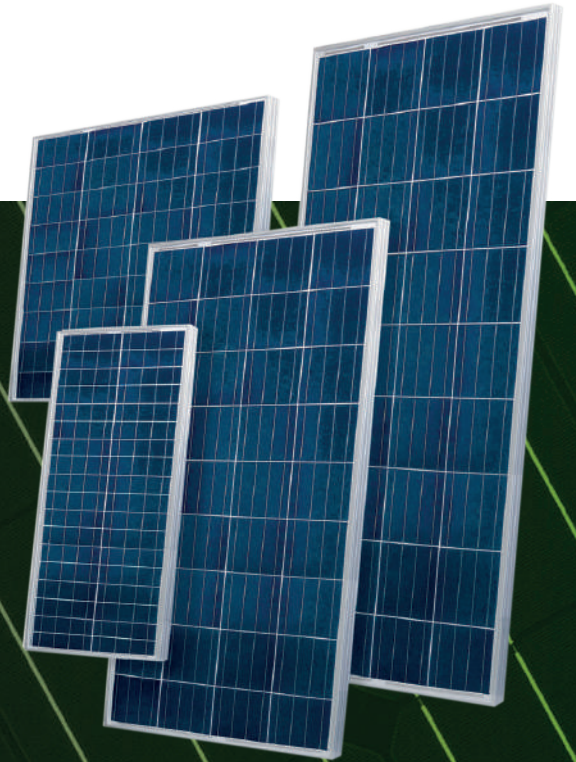

- Industry leading module power output warranty
- International quality, safety and performance certifications
- Manufacturing facility certified to ISO9001 quality management system standards
- Beautiful appearance, good durability & easy installation
- Special design in accordance with requirements of customers




WARRANTIES

10 years for product defects in materials & workmanship

10 years for 90% of warranted minimum power output

25 years for 80% of warranted minimum power output

25 years linear warranty

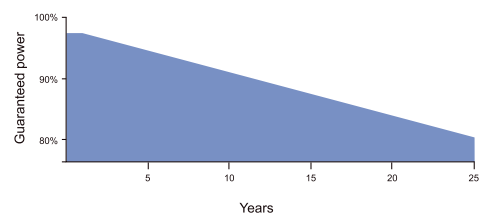

QUALITY DESIGN | GREAT DURABILITY | EASY INSTALLATION

150W~200W PRODUCT SPECIFICATION

Model type	150W	200W
Peak power(Pmax)	150W	200W
Weight(kg)	11Kg	14.5Kg
Dimensions(mm)	1480x670x35mm	1320x992x35mm
Maximum power voltage (Vmp)	17.46V	17.46V
Maximum power current (Imp)	8.6A	11.46A
Open circuit voltage (Voc)	21.8V	21.8V
Short circuit current (Isc)	9.2A	12.25A
Maximum system voltage	DC 1000V	
Temp.Coeff.of Isc(TK Isc)	0.045%/°C	
Temp.Coeff.of Voc(TK Voc)	-0.34%/°C	
Temp.Coeff.of Pmax(TK Pmax)	-0.47%/°C	
Normal Operating Cell Temperature	45±2°C	
Tolerance	±3%	

PRODUCT SPECIFICATION

Model type	80W	100W	120W
Peak power(Pmax)	80W	100W	120W
Weight(kg)	5.9Kg	7.7Kg	9Kg
Dimensions(mm)	78x670x30mm	102x670x30mm	1205x670x30mm
Maximum power voltage (Vmp)	18.5V	18.2V	17.46V
Maximum power current (Imp)	4.32A	5.49A	6.88A
Open circuit voltage (Voc)	22.6V	22.3V	21.8V
Short circuit current (Isc)	4.58A	5.82A	7.36A
Maximum system voltage	DC 1000V		
Temp.Coeff.of Isc(TK Isc)	0.045%/°C		
Temp.Coeff.of Voc(TK Voc)	-0.34%/°C		
Temp.Coeff.of Pmax(TK Pmax)	-0.47%/°C		
Normal Operating Cell Temperature	45±2°C		
Tolerance	±3%		

10W~60W PRODUCT SPECIFICATION

Model type	10W	20W	60W
Peak power(Pmax)	10W	20W	60W
Weight(kg)	1.5Kg	2Kg	6Kg
Dimensions(mm)	240x340x17mm	470x340x25mm	820x670x30mm
Maximum power voltage (Vmp)	17.46V	17.46V	17.46V
Maximum power current (Imp)	0.58A	1.15A	3.44A
Open circuit voltage (Voc)	21.8V	21.8V	21.8V
Short circuit current (Isc)	0.62A	1.23A	3.68A
Maximum system voltage	DC 1000V		
Temp.Coeff.of Isc(TK Isc)	0.045%/°C		
Temp.Coeff.of Voc(TK Voc)	-0.34%/°C		
Temp.Coeff.of Pmax(TK Pmax)	-0.47%/°C		
Normal Operating Cell Temperature	45±2°C		
Tolerance	±3%		